



珠海市汇彩照明有限公司
Auroras Lighting Solution (Zhuhai) Co., Ltd

Please visit our website for more products.



AS-HBL-120W-C3

LED High Light Series Specification Sheet

A: Specifications

1、LED Specification

	Min .Value	Typical Value	Max. Value
Power	-	120W	125 W
Rated current		3.6 A	3.8 A
LEDs Rated voltage		33 V	34 V
WW CCT		3200 K	3900 K
PW CCT		5500 K	6000 K
CW CCT.		6500 K	7000 K
Working temp.		85 °C	105 °C
LED chip qty		3 X 40 PCS	-
Lighting effect grade		100LM/W	105LM/W
Chip brand	45 Mil BRIDGELUX from USA		

2、Power supply spec

posting Mode	Driver Built- in
Input Voltage	AC85V~265V
Frequency Range	50Hz~60Hz
Input Power(max)	130W
Total Harmonic Distortion	≤ 9 %
Power Factor	>0.98
Power Efficiency	> 88 %
Output mode	constant current
Output Voltage	DC 33-36V
Output Current	3.6-3.8A constant current
Power Brand	MEANWELL-HLG-150-36A
Certificate	CE, ROHS
Lifetime	30000 Hrs

3、 Lamp fixture spec


Working Voltage		AC85~265V
Led quantity		3pcs
Led Consumption		120 W
System Consumption		125 W
Led Luminous Efficiency		100Lm /W
Led Initial Flux		>11500 Lm
lamp's Efficiency		>87 %
Average Luminance	4M	877Lux
	6M	467 Lux
	8M	285 Lux
Luminance Area	4M	Φ6.7 M
	6M	Φ8.3M
	8M	Φ14.7 M
Luminance Uniformity		>0.5
Color Temperature		As above shows
Color Rendering Index		Ra>80
Light Distribution		Round shaped
Light Design		LED+ LED+ diffuser
Junction Temperature		≤80℃
Working Temperature		-40℃ ~ 55℃
Storage Temperature		-25℃ ~ +65℃
IP Grade		IP20
Net weight		6.4 Kg
Working Life-span		50000H
Power line		0.75mm ² 3wire cable
Connect Wire	Brown	L
	Blue	N
	Yellow/Green	G
Certificate		CE, ROHS
The color of the lamp fixture		Silver

*****Remark: ≤5% of difference of CCT is allowed*****


4、Dimensions




5、Luminous Intensity Distribution(C)

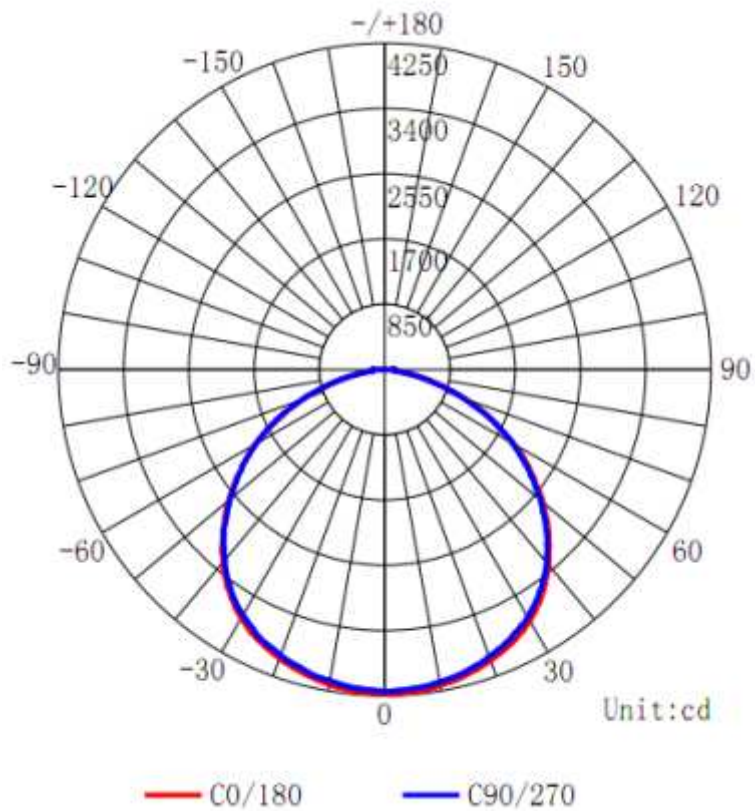

6、ISOLUX Diagram

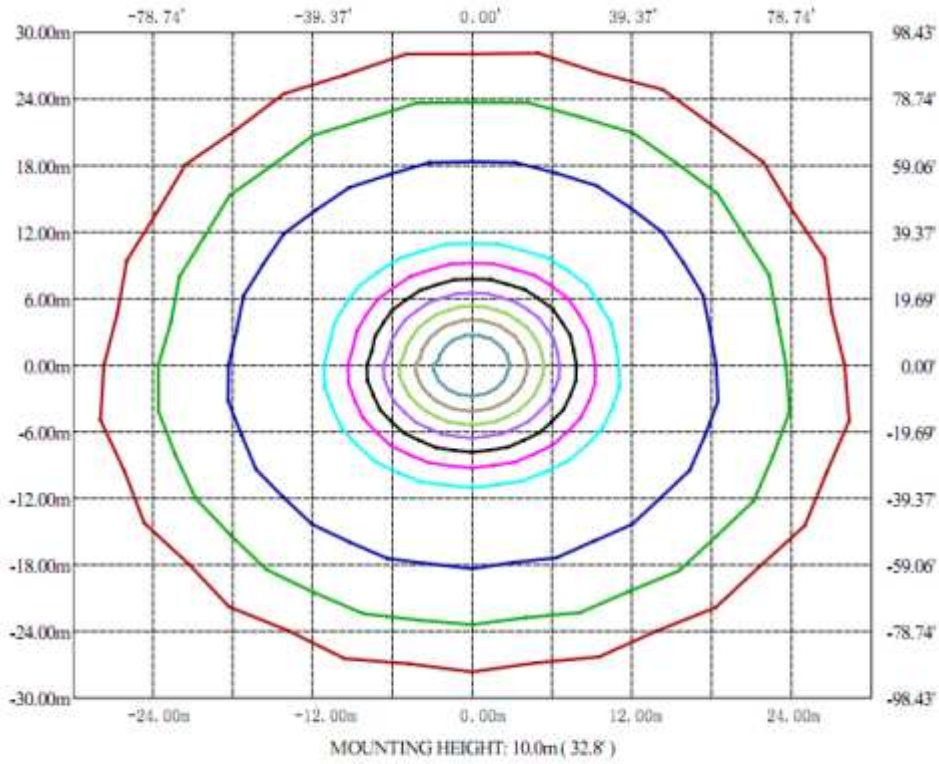


3.0% 1.2579lx 0.1169fc	5.0% 2.0965lx 0.1948fc	10.0% 4.1929lx 0.3895fc
30.0% 12.579lx 1.1686fc	40.0% 16.772lx 1.5581fc	50.0% 20.965lx 1.9476fc
60.0% 25.158lx 2.3371fc	70.0% 29.351lx 2.7267fc	80.0% 33.544lx 3.1162fc
90.0% 37.737lx 3.5057fc		

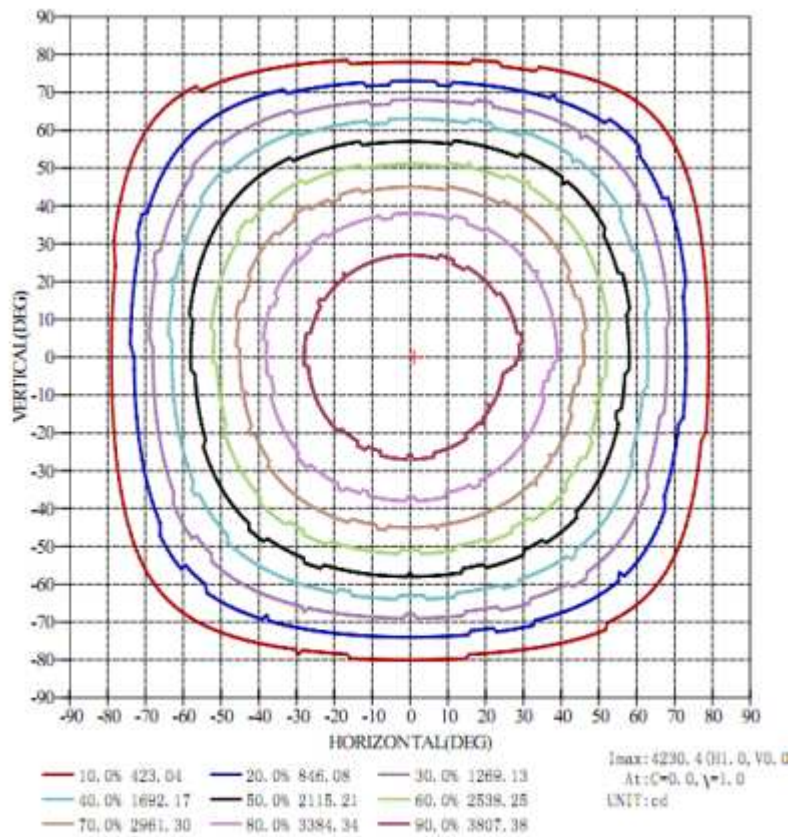

10.0% 423.04	20.0% 846.08	30.0% 1269.13
40.0% 1692.17	50.0% 2115.21	60.0% 2538.25
70.0% 2961.30	80.0% 3384.34	90.0% 3807.38

7、 Valid average illumination

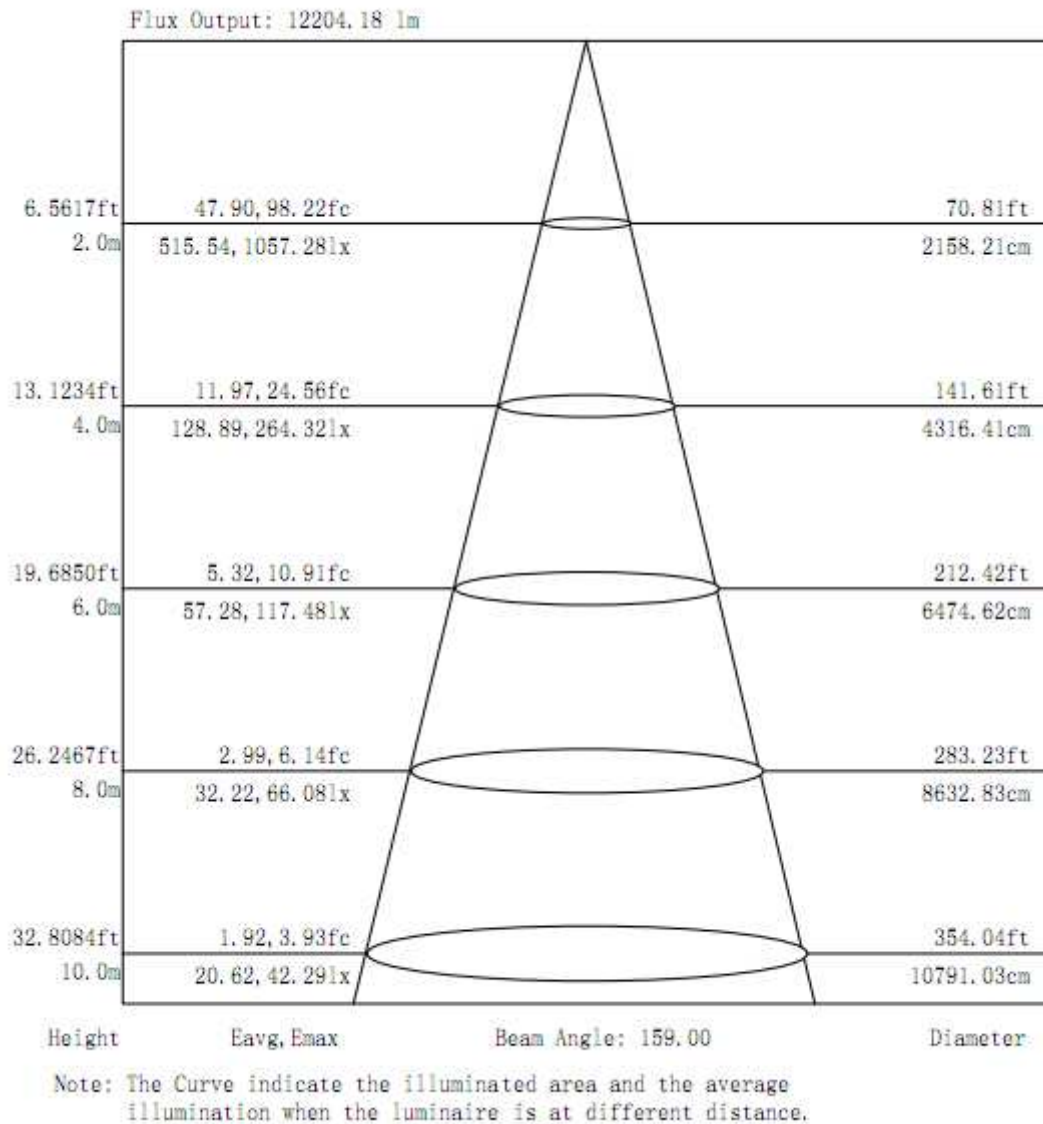

B: Packing:

1、 1: Packing size and weight

The size of the radiator package size	350(mm)*350(mm)*450(mm)
The size of the reflector package (20pcs/CTN)	520(mm)*520(mm)*400(mm)
The weight of the radiator after packing	6.9 Kg

2. Package general view

