

AURORAS
Excellence of Sustainable Energy



DIYA

The radiance of the sun

www.auroraslighting.com



DIYA

AIO SOLAR STREET LIGHT


DIYA is an all-in-one solar street light designed for a wide range of outdoor applications, including roads, industrial areas, and public spaces. With power options from 60W to 200W, it supports pole heights from 6 to 15 meters, delivering reliable and uniform illumination for different project requirements.

DIYA features adjustable LED modules for precise light distribution, combined with a high-efficiency solar panel and a large-capacity LiFePO₄ battery to ensure stable performance and long operating autonomy. The integrated structure allows easy installation and maintenance, while compatibility with smart wireless control systems enables remote monitoring and flexible lighting management.

DIYA 60W

AIO SOLAR STREET LIGHT

AUROS
Excellence of Sustainable Energy




LED LIGHT	Luminous Flux	Max 12,600lm	LED Lifetime	>100,000 hours
	LED Power	60W	CRI	Ra≥70
	Luminous Efficiency	210lm/W	CCT	2200K~6000K
	LED Chips	SMD5050 32pcs 5W/LED max	Working Temp.	-15°C ~ +65°C
SOLAR PANEL	Peak Power	82Wp	Operating Temperature	-40 °C ~ 85 °C
	Max. Voltage	18V	Lifetime	>20 years
	Solar cells efficiency	23.5%	Cable Size & Connector	2.5mm Universal MC4
	Power Tolerance (W)	±3%	Glass	High-strength tempered glass
	Technology	Monocrystalline silicon panel	-	-
LIFEPO4 BATTERY	Battery type	LiFePO4 6000mA 3.2V 32700	Cycle Life	4000 cycles @ D.O.D 50%
	Battery capacity	42Ah 537.6Wh	Working Temp.	-10°C ~ +65°C
	Voltage	12.8V	-	-
MPPT CONTROLLER	System Voltage	12V	Tracking Efficiency	98%
	Max Load Power	80W	Motion Sensor	PIR / Microwave Optional
	Charge Current	10A	-	-
OTHER	Light Dimension	1085*410*350mm	Certification	CB, ROHS, CE
	Pole Diameter	76mm	CTN SIZE	•
	IP&IK Protection	IP65 IK08	G.W	•
	Material	Aluminum Alloy	Warranty	5 Years
	Color	Grey / Black / Customized	-	-

DIYA 80W

AIO SOLAR STREET LIGHT

AUROS
Excellence of Sustainable Energy

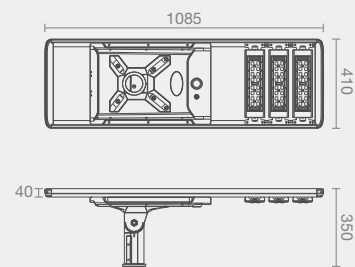


LED LIGHT	Luminous Flux	Max 16,800lm	LED Lifetime	>100,000 hours
	LED Power	80W	CRI	Ra≥70
	Luminous Efficiency	210lm/W	CCT	2200K~6000K
	LED Chips	SMD5050 48pcs 5W/LED max	Working Temp.	-15°C ~ +65°C
SOLAR PANEL	Peak Power	103Wp	Operating Temperature	-40 °C ~ 85 °C
	Max. Voltage	18V	Lifetime	>20 years
	Solar cells efficiency	23.5%	Cable Size & Connector	2.5mm Universal MC4
	Power Tolerance (W)	±3%	Glass	High-strength tempered glass
	Technology	Monocrystalline silicon panel	-	-
LIFEPO4 BATTERY	Battery type	LiFePO4 6000mA 3.2V 32700	Cycle Life	4000 cycles @ D.O.D 50%
	Battery capacity	54Ah 691.2Wh	Working Temp.	-10°C ~ +65°C
	Voltage	12.8V	-	-
MPPT CONTROLLER	System Voltage	12V	Tracking Efficiency	98%
	Max Load Power	80W	Motion Sensor	PIR / Microwave Optional
	Charge Current	10A	-	-
OTHER	Light Dimension	1280*410*350mm	Certification	CB, ROHS, CE
	Pole Diameter	76mm	CTN SIZE	•
	IP&IK Protection	IP65 IK08	G.W	•
	Material	Aluminum Alloy	Warranty	5 Years
	Color	Grey / Black / Customized	-	-

DIYA 100W

AIO SOLAR STREET LIGHT

AUORAS
Excellence of Sustainable Energy

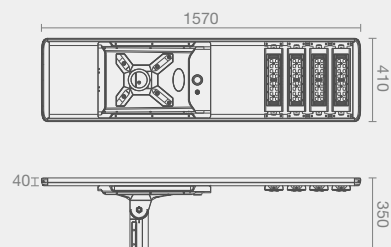


LED LIGHT	Luminous Flux	Max 21,000lm	LED Lifetime	>100,000 hours
	LED Power	100W	CRI	Ra≥70
	Luminous Efficiency	210lm/W	CCT	2200K~6000K
	LED Chips	SMD5050 64pcs 5W/LED max	Working Temp.	-15°C ~ +65°C
SOLAR PANEL	Peak Power	125Wp	Operating Temperature	-40 °C ~ 85 °C
	Max. Voltage	18V	Lifetime	>20 years
	Solar cells efficiency	23.5%	Cable Size & Connector	2.5mm Universal MC4
	Power Tolerance (W)	±3%	Glass	High-strength tempered glass
	Technology	Monocrystalline silicon panel	-	-
LIFEPO4 BATTERY	Battery type	LiFePO4 6000mA 3.2V 32700	Cycle Life	4000 cycles @ D.O.D 50%
	Battery capacity	60Ah 768Wh	Working Temp.	-10°C ~ +65°C
	Voltage	12.8V	-	-
MPPT CONTROLLER	System Voltage	12V	Tracking Efficiency	98%
	Max Load Power	100W	Motion Sensor	PIR / Microwave Optional
	Charge Current	15A	-	-
OTHER	Light Dimension	1570*410*350mm	Certification	CB, ROHS, CE
	Pole Diameter	76mm	CTN SIZE	•
	IP&IK Protection	IP65 IK08	G.W	•
	Material	Aluminum Alloy	Warranty	5 Years
	Color	Grey / Black / Customized	-	-

DIYA 120W

AIO SOLAR STREET LIGHT

AUROS
Excellence of Sustainable Energy

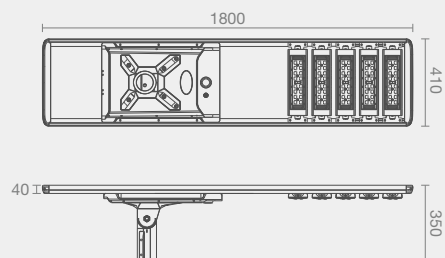


LED LIGHT	Luminous Flux LED Power Luminous Efficiency LED Chips	Max 25,200lm 120W 210lm/W SMD5050 80pcs 5W/LED max	LED Lifetime CRI CCT Working Temp.	>100,000 hours Ra≥70 2200K~6000K -15°C ~ +65°C
SOLAR PANEL	Peak Power Max. Voltage Solar cells efficiency Power Tolerance (W) Technology	148Wp 36V 23.5% ±3% Monocrystalline silicon panel	Operating Temperature Lifetime Cable Size & Connector Glass	-40 °C ~ 85 °C >20 years 2.5mm Universal MC4 High-strength tempered glass
LIFEPO4 BATTERY	Battery type Battery capacity Voltage	LiFePO4 6000mA 3.2V 32700 54Ah 864Wh 16.0V	Cycle Life Working Temp.	4000 cycles @ D.O.D 50% -10°C ~ +65°C
MPPT CONTROLLER	System Voltage Max Load Power Charge Current	24V 200W 15A	Tracking Efficiency Motion Sensor	98% PIR / Microwave Optional
OTHER	Light Dimension Pole Diameter IP&IK Protection Material Color	1800*410*350mm 76mm IP65 IK08 Aluminum Alloy Grey / Black / Customized	Certification CTN SIZE G.W Warranty	CB, ROHS, CE • • 5 Years



High Efficiency LED
SMD5050 5W/LED max



High Efficiency
Solar Panel

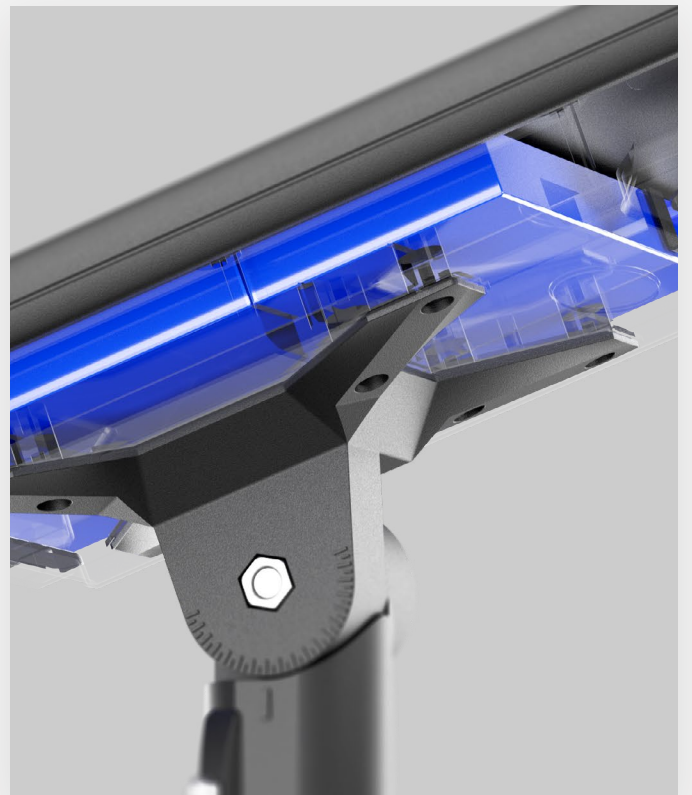

Built-in Large-capacity
LiFePO4 Battery




Adjustable
LED Module



Aluminum Alloy
IP66 Battery Enclose



Infrared / Microwave
Motion Sensors

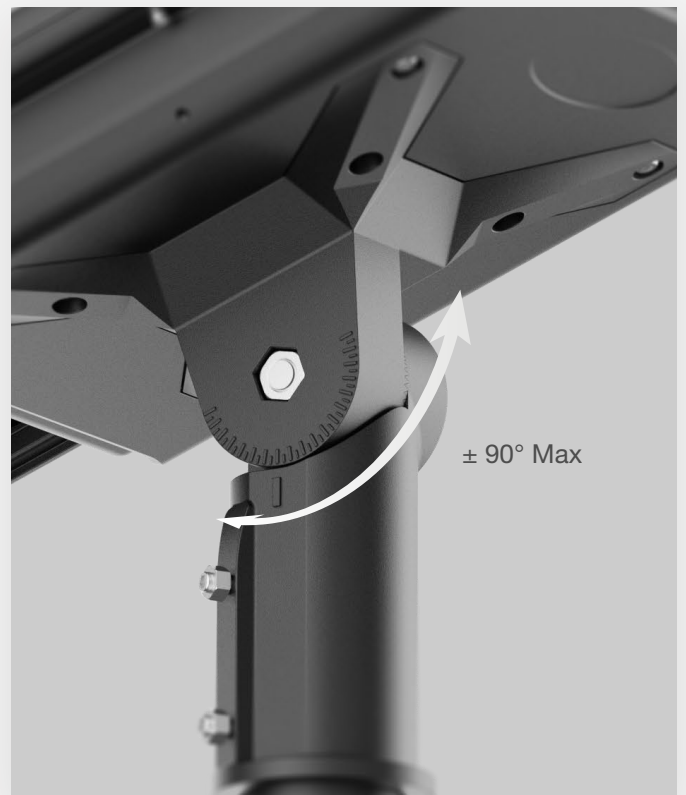

Adjustable
Mounting Bracket


Ultra Slim LED Optic

Optics play a critical role in solar street lighting performance. The luminaire is equipped with specially designed LED optics that precisely direct light onto the roadway, minimizing light loss outside the target area. Its ultra-narrow and extended light distribution ensures smooth, uniform illumination with no dark spots between poles, delivering high brightness over longer distances and enabling wider pole spacing, which effectively reduces overall project costs.

Lens Material	Light Utilization	Protection
PMMA	≥93%	Anti-UV, Anti-yellowing



Light Distribution Curve

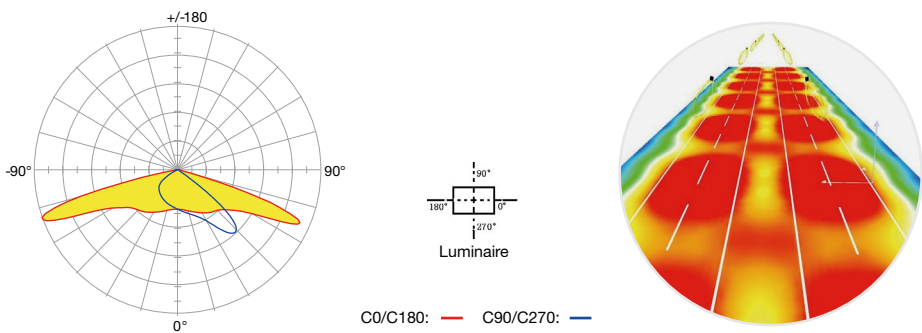

Installation Method



Lighting Working Mode

In addition to automatic switching on and off , you have the possibility of setting different lighting program easily by the simple remote control according to the needs of the project. Also you can set the light to work for 6 hours or 12 hours.

Mode A

1H 100%
full power

4H/30%(sensor 100%)

9H/20%(sensor 50%)

Mode B

14H/30%(sensor 100%) + 1H/Morning function

Mode C

14H/30%(without sensor) + 1H/Morning function

Applications



Street, Road



Bike Track, Pathway



Residential, Villa



Public Area, Park, Car Parking Lot




Jetties, Coastal, Marina, Dock



Farms, Fences, etc

Hybrid System with 220V Grid Supply (Optional)

The solar streetlight features a hybrid system with AC grid backup, ensuring reliable operation in areas with limited solar radiation or prolonged bad weather. The intelligent control system automatically switches to grid power when battery energy is low and returns to battery operation once fully recharged, guaranteeing continuous, uninterrupted lighting throughout the year.

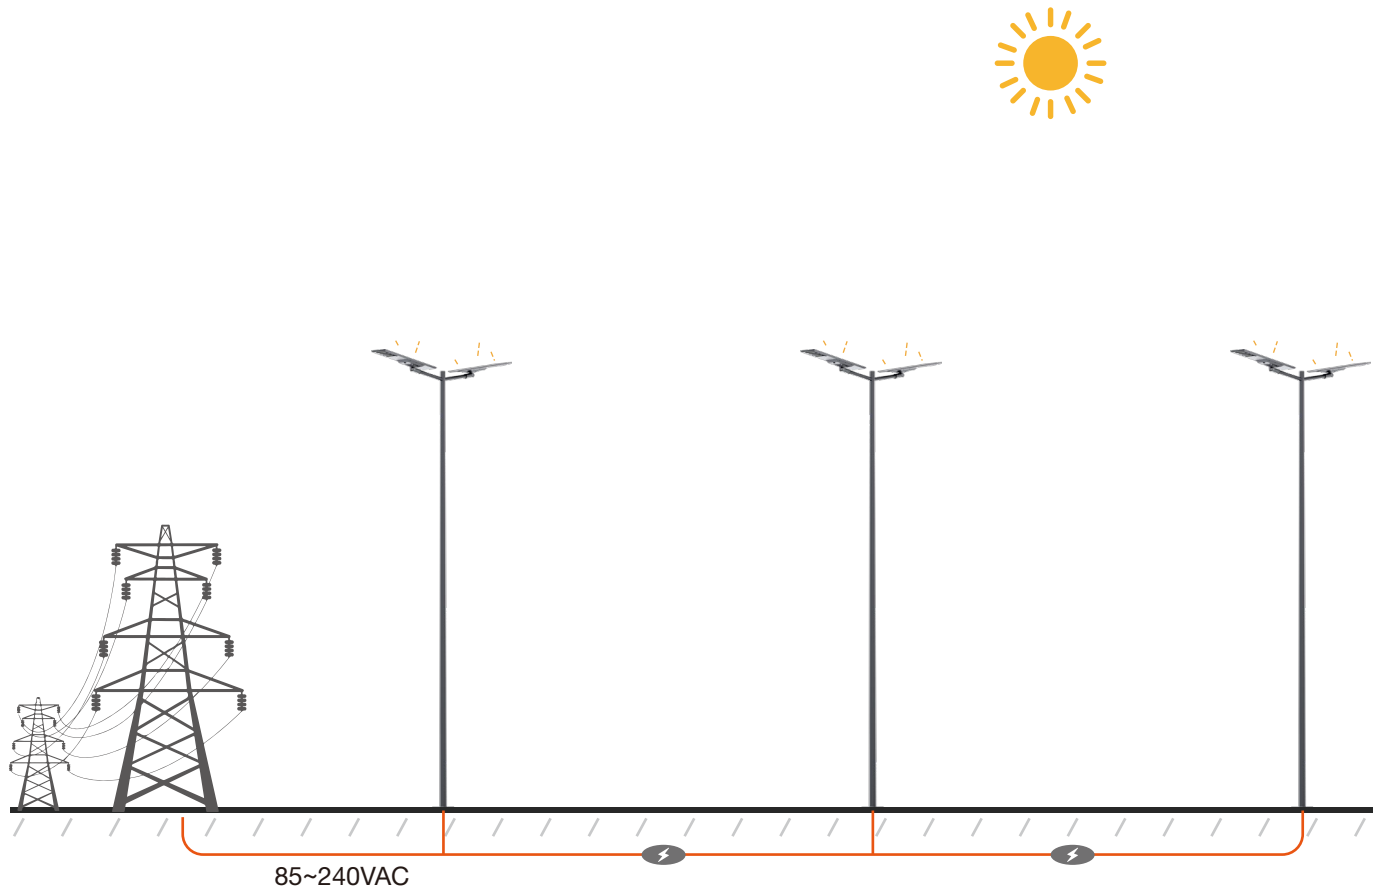

FEATURES



High reliability

Dual power supply guarantee, no risk of lighting interruption.




Energy saving

Give priority to the use of clean energy to reduce carbon emissions.



More economical


Reduce power consumption and low long-term use cost.



Flexible installation

Suitable for areas where solar energy resources are unstable or require high brightness.

Zhaga Book 18 socket
with D4i protocol

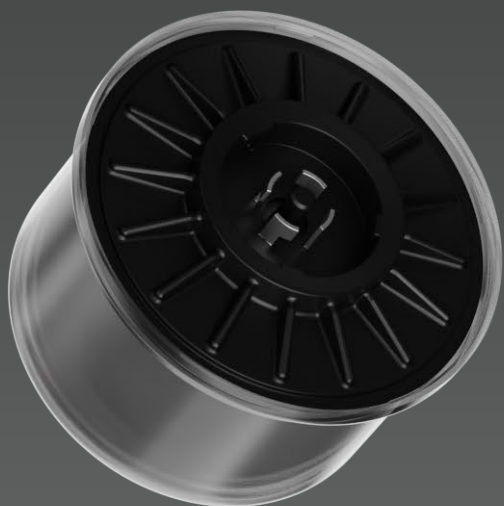

Zhaga-D4i Smart Interface (Optional)

Supports a Zhaga Book 18 socket with the standardized D4i protocol, enabling true plug-and-play integration of smart sensors, communication nodes, and IoT controllers. By adopting the open D4i standard, modules from different manufacturers can be installed on the same interface and communicate seamlessly with the luminaire.

Unlike many solar lighting systems that use Zhaga sockets with proprietary protocols, the Zhaga-D4i interface ensures broad compatibility and avoids vendor lock-in. Users can freely select third-party smart modules and integrate the lighting system into various smart city platforms, providing greater flexibility, easier maintenance, and long-term upgradeability.

Open Standard Interface

Zhaga Book 18 with D4i ensures compatibility with modules from different manufacturers.

No Vendor Lock-in

Supports third-party modules without relying on a single supplier or platform.

Plug-and-Play Upgrade

Smart sensors and communication nodes can be easily installed or replaced.

Smart City Ready

Enables seamless integration with IoT lighting control systems.

IoT Smart Control Solutions (Optional)

Our solar street lights can be seamlessly integrated with advanced IoT communication modules, allowing each street light to automatically report key data such as operating status, battery health and solar power generation, while supporting remote switching, adaptive dimming and instant fault diagnosis.



Single light control



Wireless Network



Malfunction management



Energy consumption analysis




Intelligent monitoring



SMART CONTROL SOLUTION

Advantages


Ultra-low power consumption, ultra-long distance

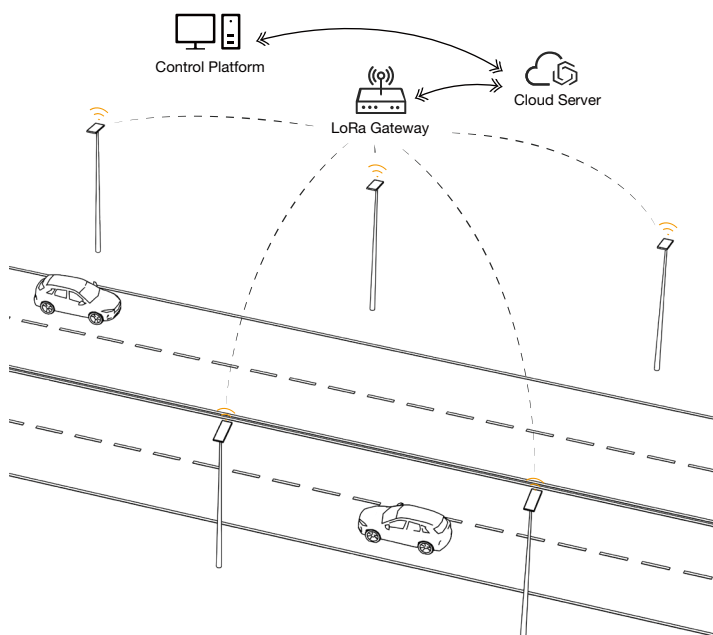

SMART CONTROL SOLUTION

Advantages

Fast speed, no gateway required, Ultra long distance, High connection stability

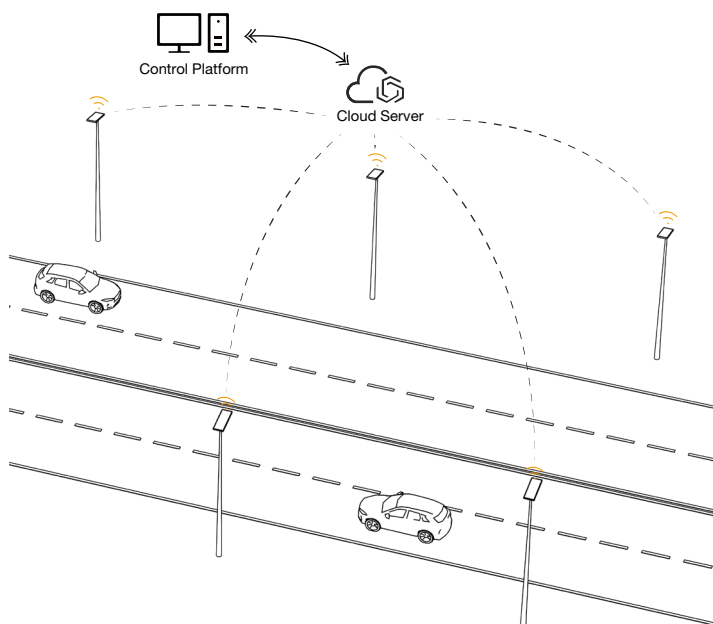

AURORAS INNOTECH GUANGDONG CO., LTD.

Website :
www.auroraslighting.com

Email :
Sales@auroraslighting.com

China Headquarter :
903# Block A, Gree Innovation City, Zhuhai 519000 CHINA

WhatsApp :
+86 180 2307 5361

Telephone :
+86 0756-8530887

Saudi Factory :
Street 59# Al-Kharj Industrial City, Riyadh SAUDI ARABIA